

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 65/00	A2	(11) International Publication Number: WO 99/57397 (43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/GB99/01411 (22) International Filing Date: 6 May 1999 (06.05.99) (30) Priority Data: 9809640.7 6 May 1998 (06.05.98) GB (71) Applicant (for all designated States except US): MERITOR LIGHT VEHICLE SYSTEMS (UK) LTD. [GB/GB]; Ford- house Lane, Stirchley, Birmingham B30 3BW (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): KALSI, Gurbinder, Singh [GB/GB]; 59 Wolverhampton Road, Oldbury, Warley, West Midlands B68 0NF (GB). (74) Agents: BARNFATHER, Karl, Jon et al.; Withers & Rogers, Goldings House, 2 Hays Lane, London SE1 2HW (GB).		(81) Designated States: IN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: LATCH MECHANISM (57) Abstract A door latch mechanism (10) including a housing, a pawl (15) moveably mounted in the housing to release the latch, a pawl lifter (20) connected to the pawl with an inside lock link (21) and an outside lock link (22) mounted on the pawl lifter with the lock links being moveable between a respective first position at which operation of an associated door handle causes movement of the pawl to release the latch and a second position at which operation of the associated door handle does not cause movement of the pawl. Preferably movement of the lock links is effected by a power actuator.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

LATCH MECHANISM

The present invention relates to latch mechanisms for doors of vehicles. The invention further relates to vehicles including at least 2 doors, each door incorporating a latch mechanism.

It is known to provide latch mechanisms on doors of vehicles to allow opening and closing of the door. Such latch mechanisms have various modes of operation eg

- a) Lock mode, wherein operation of an outside door handle does not open the latch mechanism
- b) Superlocked mode, when in operation of an outside or an inside release lever does not operate the latch mechanism.
- c) Child safety mode, wherein operation of an inside release lever does not open the latch mechanism, whether or not the latch mechanism is locked, and
- d) Release mode, wherein the latch mechanism is released via means other than operation of the inside or outside release levers.

Each mode has alternate states eg locked/unlocked, superlocked/not superlocked, child safety on/off and release/not released.

Typically each mode requires an individual mechanism to effect the alternative states, with operation of each mechanism being affected either manually or with an individual power actuator.

In the case of a latch mechanism operated entirely by power actuators, such as DC motors, it is also necessary to be able to open a locked door which has the child safety feature on in an emergency situation when actuation of the power actuators is not possible, such as when the keys to the vehicle are not available.

Thus according to the present invention there is provided a latch mechanism including a housing, a pawl movably mounted in the housing to release the latch, with at least one of an inside and outside lock link mounted for movement with the pawl with the at least one lock link being movable between a first position at which operation of an associated release means causes movement of the pawl to release the latch, and a second position at which operation of the associated release means does not cause movement of the pawl.

Preferably movement of the at least one lock link between its first and second position is effected by a power actuator.

According to a further aspect of the invention there is also provided a latch mechanism having a set of operating modes, each mode having alternate states, the set including at least one of a lock mode and, a super lock mode, and at least one of a child safety mode and a release mode, changing of the latch mechanism between alternate states of each of the at least two modes of the set being effected by a single power actuator.

According to a further aspect of the invention there is provided a latch mechanism having a set of operating modes, each mode having alternate states, the set including a child safety mode and a release mode, changing of the latch mechanism between alternate states of each of the modes being effected by a single power actuator.

According to a further aspect of the invention there is provided a vehicle including a first and second door, each door including respective first and second latch mechanisms, the first and second latch mechanisms being substantially the same, and being operable by respective first and second power actuators to give respective first and second sets of operating modes each mode having alternate states, control of the power actuators being different to provide for different first and second sets of operating modes.

The invention will now be described by way of example only with reference to the accompanying drawings in which;

Fig.1 is a latch mechanism according to the present invention in a super-locked condition;

Fig.1a is an enlarged view of part of Fig.1;

Fig.1b is a schematic view in the direction of arrow A of Fig.1;

Fig.2 is the latch mechanism of Fig.1 in a locked position with child safety on;

Fig.3 is the latch mechanism of Fig.1 in an unlocked condition with the child safety on;

Fig.4 is the latch mechanism of Fig.1 in a locked condition with the child safety off;

Fig.5 is the latch mechanism of Fig.1 in an unlocked position with the child safety off; and

Fig.6 is a latch mechanism of Fig.1 in a release position.

With reference to Figs 1-6 there is shown a latch mechanism 10 including a body 11 which supports various components of the latch mechanism 10 as indicated below.

Latch mechanism 10 further includes a claw 12 pivotally mounted about axis 13 on the body 11. Claw 12 acts to secure an associated door (not shown) in a closed position via a striker pin 14 attached to the door aperture. Rotation of the claw 12 in an anticlockwise direction about axis 13 when viewing Fig.1 allows release of the striker pin 14, thus enabling opening of the associated door.

The claw 12 is held in a closed position by a pawl 15, only part of which is shown in dotted profile in Fig.1 for clarity. Pawl 15 is pivotally mounted on body 11 and can rotate about axis 16. Claw 12 can be held in a first safety position (not shown) when pawl 15 engages first safety abutment 17.

Pawl lifter 20 is generally flat and lies in a plane parallel to pawl 15, to which it is rotationally secured. When viewing Fig.1 pawl 15 is obscured by pawl lifter 20. Clearly, pawl lifter 20 also rotates about axis 16.

Inside lock link 21 and outside lock link 22 are mounted for movement with the pawl, in this case they are each individually pivoted about respective axes 21a and 22a on pawl lifter 20. In this case inside lock link 21 and outside lock link 22 are identical and each have respective cam followers 21b and 22b

and release abutments 21c and 22c. Inside lock link 21 and outside lock link 22 are each biased in a clockwise direction when viewing Fig.1 such that the respective cam followers 21b and 22b contact cam 30.

Cam 30 is capable of rotating independently from pawl lifter 20 about axis 16. Cam 30 has three lobes 31, 32 and 33 and two levers 34, and 35 shown diagrammatically for clarity. Lobes 31, 32, 33 and levers 34 and 35 are all rotationally fast with cam 30. Preferably cam 30 can at least be rotated to the various positions as described below by a power actuator (not shown) such as a DC motor or preferably a stepper motor.

Outside release lever 40 is pivotally mounted about axis 41. Inside release lever 43 (shown diagrammatically in Fig.1b) is pivotally mounted about axis 44.

Operation of a door latch mechanism is as follows.

Fig.1 shows the door latch mechanism in a super lock condition, that is to say operation of the outside release lever 40 or inside release lever 43 does not allow unlatching of the mechanism. In particular it can be seen that if

outside release lever 40 were to be operated by being rotated in a clockwise direction about axis 41, abutment 42 would pass release abutment 22c of outside lock link 22 without contact (note that outside release lever 40 is in the same plane as outside lock link 22). Similarly inside release lever 43 when operated by being rotated in an anticlockwise direction about axis 44 when viewing Fig.1b, would cause abutment 45 to pass release abutment 21c of inside lock link 21 (see especially Fig.1).

Fig.2 shows the door latch mechanism 10 in a locked position with the child safety feature on. It will be noted that cam 30 has been rotated 30 degrees in an anticlockwise direction when compared to Fig.1. However, the inside lock link 21 and outside lock link 22 are in the same position when compared with Fig.1 since neither of the cam followers 21b or 22b have, at this stage, ridden up any of the lobes 31, 32 or 33 of the cam 30. However, lever 34 has been rotated to a position whereby operation of the inside release lever 43 in an anticlockwise direction when viewing Fig.1b would cause abutment 46 to contact lever 34 and rotate cam 30 to the position shown in Fig.3. Note this initial operation of inside release lever 43 does not unlatch the mechanism but only operates to unlock the door (see below). This method of being able to override and open a locked door which has the child safety on is especially important in an emergency situation whereby a passer-by can effect

access to the inside door handle (eg by breaking the door window glass), operate the inside door handle to unlock the door, then operate the outside door handle to open the door and then remove the child from the car.

Fig.3 shows the door latch mechanism 10 in an unlocked condition with the child safety feature on. In this case the cam 30 has been rotated sufficiently (either by operating the inside release lever when the cam was in the position shown in Fig.2 or by independent rotation of the cam directly eg by a power actuator) such that cam follower 22b has ridden up cam lobe 32 resulting in anticlockwise rotation of outside lock link 22. Thus when outside release lever 40 is operated, abutment 42 contacts release abutment 22c causing the pawl lifter 20 as a whole to rotate anticlockwise when viewing Fig.3 and releasing the pawl 15 and allowing the claw 12 to open. Stop 22d limits the anticlockwise rotation of outside lock link 22. Upon release of the outside release lever 40 the pawl lifter 20 is biased back to the position as shown in Fig.3 by a spring (not shown). It should also be noted that the inside lock link 21 is in the same position as that shown in Fig.1, thus operation of the inside release lever 43 does not allow opening of the door.

Fig.4 shows the door latch mechanism 10 in a locked condition with the child safety feature off. It should be noted that the cam 30 has been rotated

90 degrees in an anticlockwise direction when compared with Fig.1. This results in cam follower 22b being situated between cam lobes 32 and 33 thus ensuring that operation of outside release lever 40 does not release the latch mechanism. Furthermore, the rotation of the cam 30 has caused cam follower 21b to ride up cam lobe 31 causing inside lock link 21 to rotate anticlockwise about axis 21a. Thus abutment 21c of inside lock link 21 is contacted by abutment 45 of inside release lever 43 when it is operated. This causes anticlockwise rotation of the pall lifter 20 about axis 16 resulting in unlatching of the door mechanism and allowing the door to be subsequently opened. Stop 21d limits the anticlockwise rotation of inside lock link 21. It should be noted that the operation of the inside release lever 43 also causes abutment 46 to contact lever 35 causing rotation of cam 30 to the position shown in Fig.5. This prevents a vehicle occupant inadvertently locking himself out of the vehicle since opening of the door from the inside automatically unlocks the door, allowing subsequent opening from the outside.

Fig.5 shows the door latch mechanism 10 in an unlocked position with the child safety feature off. It can be seen that the cam has been rotated (either by operating the inside release lever when the cam was in the position shown in Fig.4 or by independent rotation of the cam directly eg by a power actuator) such that abutment 22b now rests on lobe 33 allowing operation of the outside release lever 40 to unlatch the latch mechanism as described above.

Furthermore abutment 21b remains in contact with lobe 31 thus ensuring that operation of the inside release lever also unlatches the door mechanism.

Fig.6 shows the door latch mechanism 10 in a released position. This is achieved by rotation of cam 30 in a anticlockwise direction which allows contact between corresponding lost motion abutments (not shown) on the pawl lifter 20 and cam 30. Such lost motion abutments allow the cam 30 to rotate the pawl lifter 20 to release the door latch mechanism independently of the operation of the outside release lever 40 or the inside release lever 43.

Note that only a single cam is required to effect the various modes of operation.

In further embodiments the inside and outside lock links can be mounted directly on the pawl.

CLAIMS

1. A latch mechanism including a housing, a pawl movably mounted in the housing to release the latch, with at least one of an inside and outside lock link mounted for movement with the pawl with the at least one lock link being movable between a first position at which operation of an associated release means causes movement of the pawl to release the latch, and a second position at which operation of the associated release means does not cause movement of the pawl.
2. A latch mechanism as defined in claim 1 in which the pawl is rotatably mounted in the housing.
3. A latch mechanism as defined in claim 1 or 2 in which a pawl lifter is connected to a pawl and the at least one lock link is mounted on the pawl lifter.
4. A latch mechanism as defined in any preceding claim in which the at least one lock link is pivotally mounted for rotational movement between its first and second positions.

5. A latch mechanism as defined in any preceding claim in which the inside and outside lock link are both mounted for movement with the pawl.
6. A latch mechanism as defined in any preceding claim in which indexing of a cam effects movement of the at least one lock link between its first and second positions.
7. A latch mechanism as defined in claim 6 in which the cam is rotationally mounted for indexing.
8. A latch mechanism as defined in claim 7 when dependent upon claim 2 in which the cam is rotationally mounted co-axially with the pawl.
9. A latch mechanism as defined in any one of claims 6 to 8 in which the cam includes at least 2 cam lobes which position the at least one lock link in one of the first and second positions, with the at least 2 cam lobes being separated by a cam valley which positions the at least one lock link in the other of the first and second positions.
10. A latch mechanism as defined in any one of claims 6 to 9 in which indexing of the cam effects movement of both the inside and outside lock links.

11. A latch mechanism as defined in any one of claims 6 to 10 in which the cam has a plurality of lobes.

12. A latch mechanism as defined in any one of claims 6 to 11 in which the release means is capable of indexing the cam to move at least one of the lock links between the first and second positions.

13. A latch mechanism as defined in claim 12 in which the release means is capable of indexing the cam to move at least one of the lock links from its second position to its first position.

14. A latch mechanism as defined in any preceding claim in which movement of the at least one lock link between its first and second position is effected by a power actuator.

15. A latch mechanism as defined in any previous claim in which the pawl is capable of being moved to release the latch by a power actuator.

16. A latch mechanism as defined in claim 15 when dependent upon claim 14 in which the power actuator which indexes the cam is the same power actuator which moves the pawl.

17. A latch mechanism as defined in claim 16 in which the power actuator drives the cam such that an abutment on the cam operatively co-acts with an abutment fast with the pawl to release the latch mechanism

18. A latch mechanism as defined in any preceding claim having a set of operating modes, each mode having alternate states, the set including at least one of a lock mode and a super lock mode, and at least one of a child safety mode and a release mode, changing of the latch mechanism between alternate states of each of the at least two modes of the set being effected by a single power actuator.

19. A latch mechanism as defined in claim 18 in which the set includes the lock mode and the super lock mode and at least one of the child safety mode and release mode.

20. A latch mechanism as defined in claim 18 or 19 in which the set includes at least one of the lock mode and super lock mode and both of the child safety mode and the release mode.

21. A latch mechanism as defined in any preceding claim having a set of operating modes, each mode having alternate states, the set including a child

safety mode and a release mode, changing of the latch mechanism between alternate states of each of the modes being effected by a single power actuator.

22. A latch mechanism having a set of operating modes, each mode having alternate states, the set including at least one of a lock mode and a super lock mode, and at least one of a child safety mode and a release mode, changing of the latch mechanism between alternate states of each of the at least two modes of the set being effected by a single power actuator.

23. A latch mechanism as defined in claim 22 in which the set includes the lock mode and the super lock mode and at least one of the child safety mode and release mode.

24. A latch mechanism as defined in claim 22 or 23 in which the set includes at least one of the lock mode and super lock mode and both of the child safety mode and the release mode.

25. A latch mechanism having a set of operating modes, each mode having alternate states, the set including a child safety mode and a release mode, changing of the latch mechanism between alternate states of each of the modes being effected by a single power actuator.

26. A vehicle body including a first and second door, each door including respective first and second latch mechanisms as defined in any preceding claim, each mechanism being operable by respective first and second power actuators to give respective first and second sets of operating modes, each mode having alternate states, and control of the power actuators being different to provide for different first and second sets of operating modes.

27. A vehicle body as defined in claim 26 in which the first and second latch mechanisms are substantially the same.

28. A vehicle including a first and second door, each door including respective first and second latch mechanisms, the first and second latch mechanisms being substantially the same, and being operable by respective first and second power actuators to give respective first and second sets of operating modes each mode having alternate states, control of the power actuators being different to provide for different first and second sets of operating modes.




FIG.1.

2/7

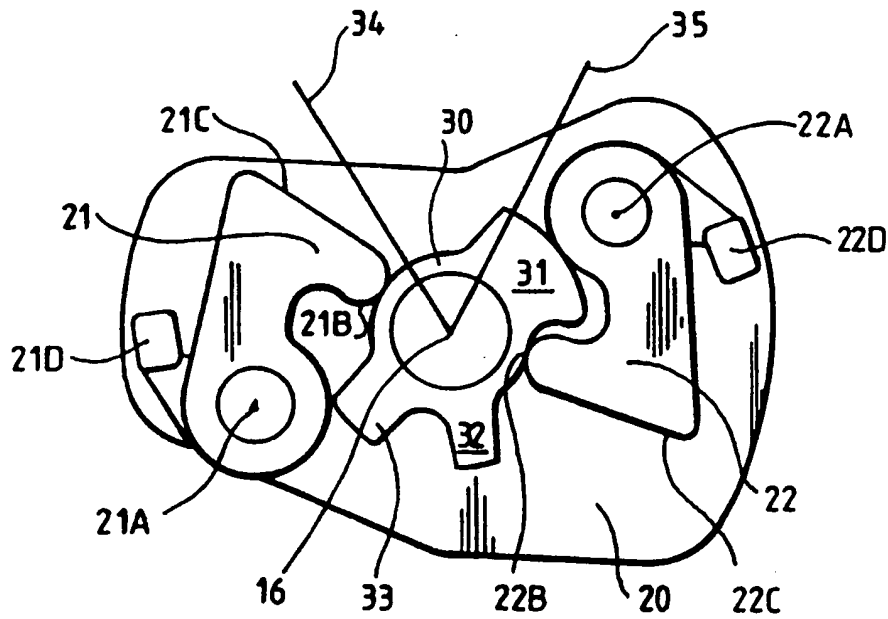


FIG. 1A.


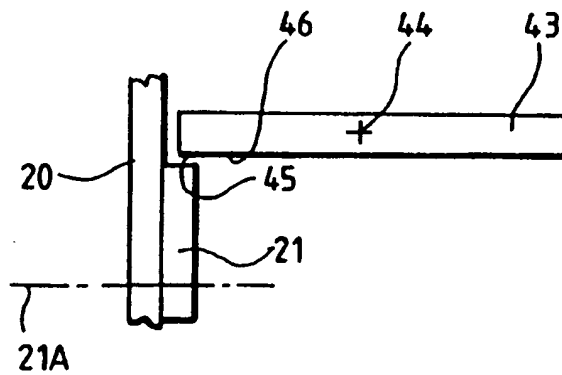


FIG. 1B.


3/7

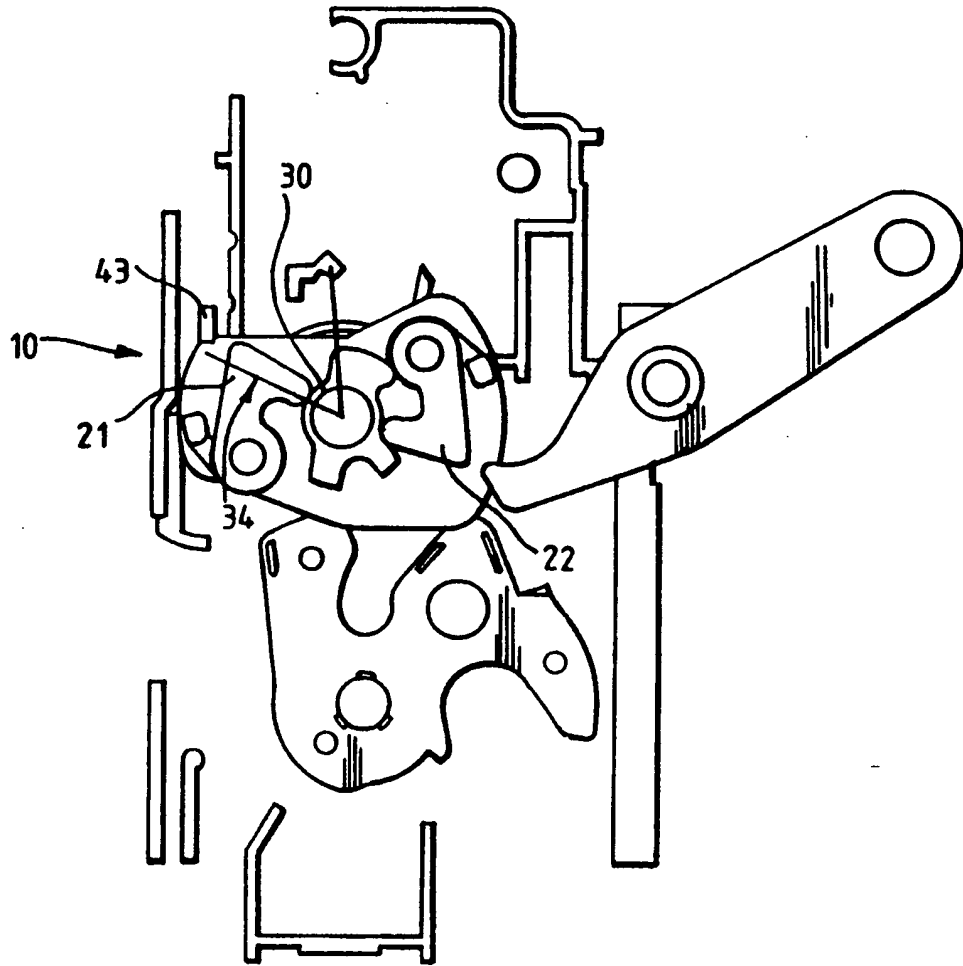

LOCKED - CHILD SAFETY ON

FIG.2.


4/7

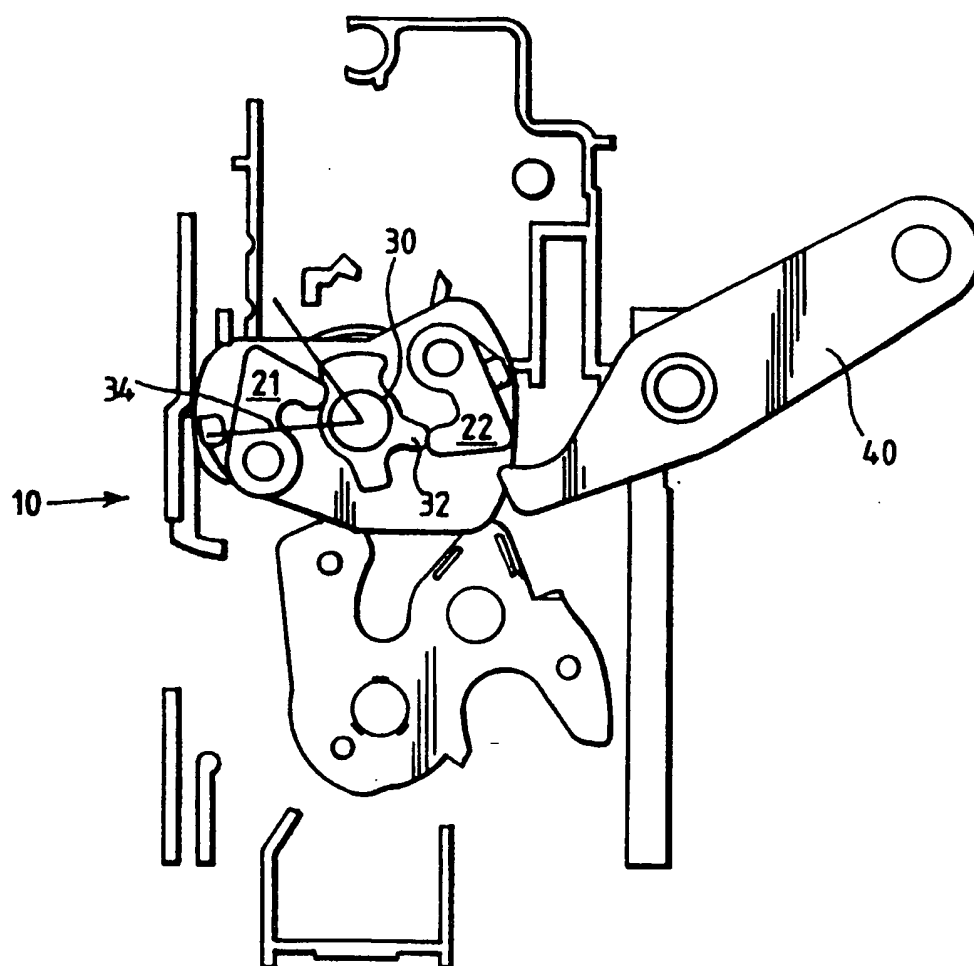

UNLOCKED — CHILD SAFETY ON

FIG. 3.


5/7

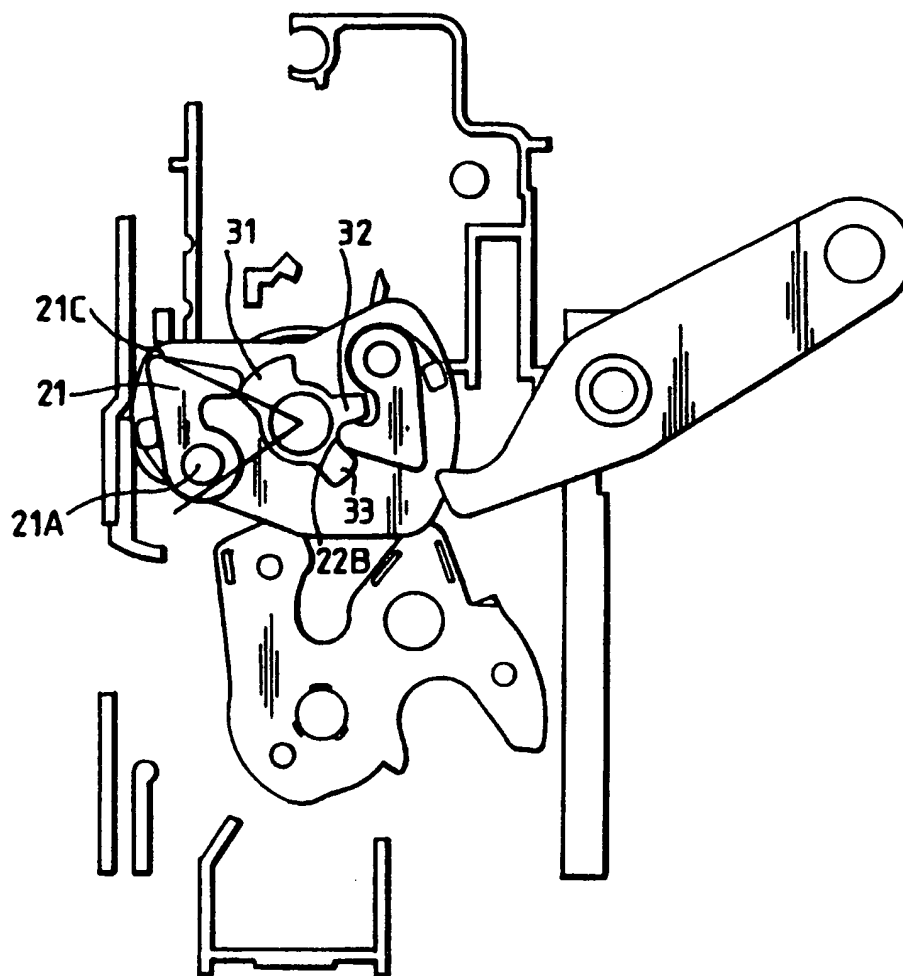

LOCKED CHILD SAFETY OFF

FIG.4.


6 / 7

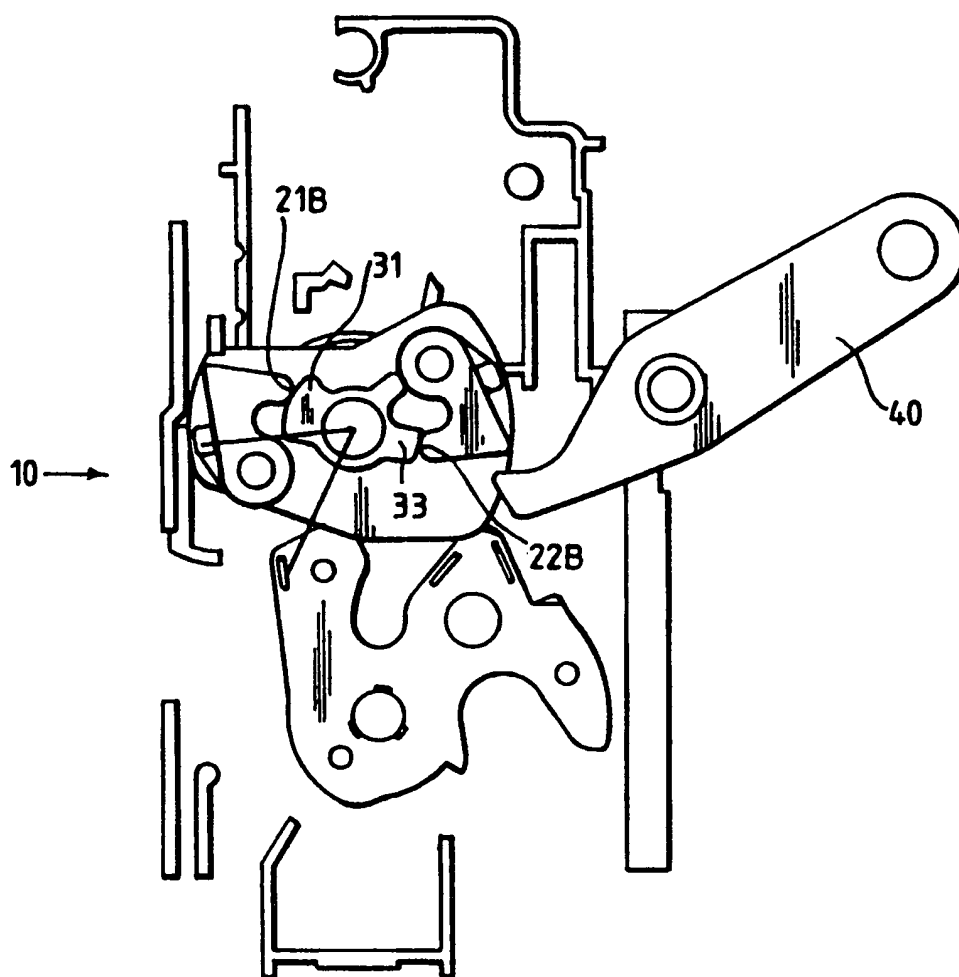

UNLOCKED CHILD SAFETY OFF

FIG.5.

7/7

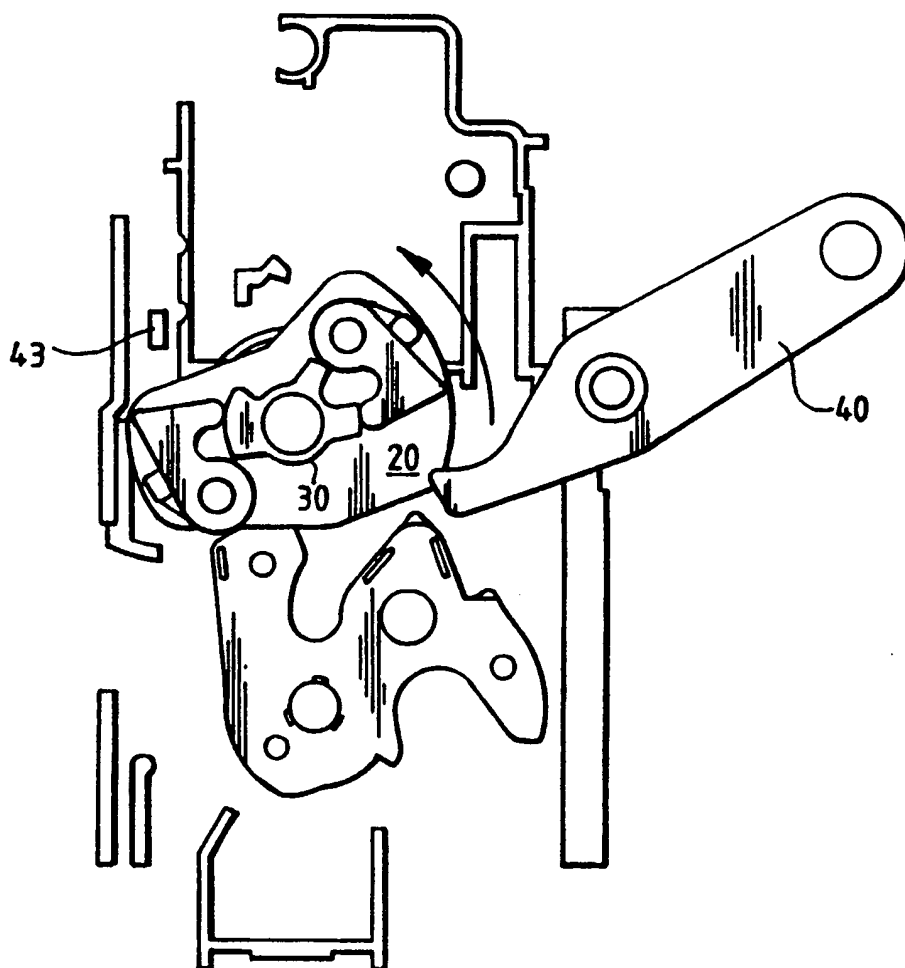

RELEASE

FIG. 6.